



Engine	Cummins 6BTAA5.9-C160
Rated Power	118 kW (158 hp / 160 ps) @ 2,200 rpm
Blade Width	3,660 mm
Maximum Speed	42 km/h
Draw Bar Pull	65 kN
Operating Weight	12,600 kg

4140D MOTOR GRADER

TOUGH WORLD. TOUGH EQUIPMENT.

4140D SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Manufacturer	Cummins
Model	6BTAA5.9-C160
Rated Power	118 kW (158 hp / 160 ps) @ 2,200 rpm
Maximum Torque	670 N·m
Number of Cylinders	6
Aspiration	Turbo & air-to-air intercooled

TRANSMISSION

Transmission Type	Power shift
Torque Converter	Three - member single turbine
Maximum Travel Speed, fwd	42 km/h
Maximum Travel Speed, rev	26.5 km/h
Number of Speeds, fwd	6
Number of Speeds, rev	3

AXLES

Differential Type	Limited slip standard
Final Drive Type	Chain drive
Axle Oscillation	16°
Front Axle, Wheel Lean Angle	Left / right 18°

STEERING

Steering Configuration	Load sensor steering gear
Steering Relief Pressure	16.7 MPa
Minimum Turning Radius	6,900 mm
Steering Angle	±50°
Frame Articulation Angle	±27°

BRAKES

Service Brake Type	Clamp
Service Brake Location	Rear axle

TIRES

Tire Size	13.00-24
-----------	----------

HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	20 MPa
Main Pump Flow	122 L/min

WORKING CAPACITIES

Maximum Draw Pull	65 kN
Cutting Pressure	6,000 kg

TANDEM DRIVE PERFORMANCE

Height	600 mm
Width	210 mm
Center Distance	1,553 mm

MOLDBOARD PERFORMANCE

Bank Cut Angle	28~74°
Moldboard Lift Above Ground	520 mm
Moldboard Side Shift, left/right	645 / 755 mm
Maximum Sloping Angle	90°
Cutting Depth	600 mm
Circle Rotation	360°
Circle Diameter	1,265 mm
Circle Thickness	130 mm

DIMENSIONS

A Overall Length - At Max. Lifting Level	10,524 mm
B Overall Length - At Max. Digging Level	10,511 mm
C Overall Length - At Ground Level	10,888 mm
D Overall Height with Cab	3,350 mm
E Width - Dozer	2,500 mm
F Width - Outside Tires	2,450 mm
Wheelbase	5,930 mm
Clearance under Front Axle	577 mm
Moldboard Standard Length	3,660 mm
Moldboard Standard Thickness	19 mm
Moldboard Standard Height	550 mm

OPERATING WEIGHTS


Operating Weight	12,600 kg
------------------	-----------

SERVICE CAPACITIES

Fuel Tank	348 L
Engine Oil	18 L
Cooling System	35 L
Hydraulic Reservoir	165 L
Transmission and Torque Converter	33 L
Tandems, each	36 L

OPTIONAL EQUIPMENT

Rear Ripper
Front Dozer
Automatic Leveling System
Rotary Beacon
Frictional Flake Worm Box

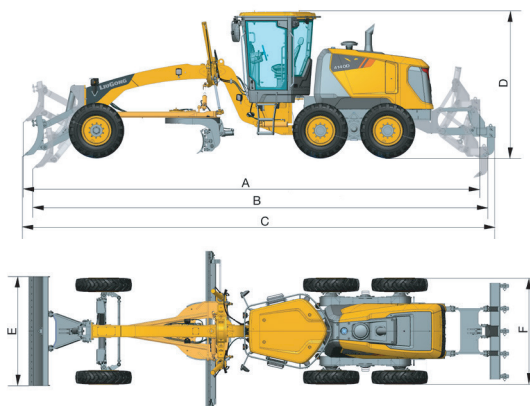

Specifications and design are subject to change notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

Head Office

Komplek Pemuda City Walk Blok B No.30,
Jalan Pemuda, Kota Pekanbaru, Riau 28291
Telp : +62-821-2790-0894
Email : admin.service@bctr.co.id

Representative Office

Springhill Office Tower Lt.11
Jl. Benyamin Sueb Ruas D7 Blok D
Kec. Pademangan, Jakarta Utara 14410